


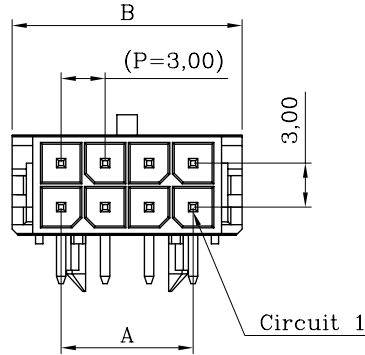





ORDER INFORMATION AND DIMENSION:

Circuits	Part No. (Matte tin-plated)	Dimension	
		A	B
2	3002P02 29V	NA	6.7
4	3002P04 29V	3.00	9.7
6	3002P06 29V	6.00	12.7
8	3002P08 29V	9.00	15.7
10	3002P10 29V	12.00	18.7
12	3002P12 29V	15.00	21.7
14	3002P14 29V	18.00	24.7
16	3002P16 29V	21.00	27.7
18	3002P18 29V	24.00	30.7
20	3002P20 29V	27.00	33.7
22	3002P22 29V	30.00	36.7
24	3002P24 29V	33.00	39.7



ISOMETRIC VIEW

DESCRIPTION OF ORDER NO.:

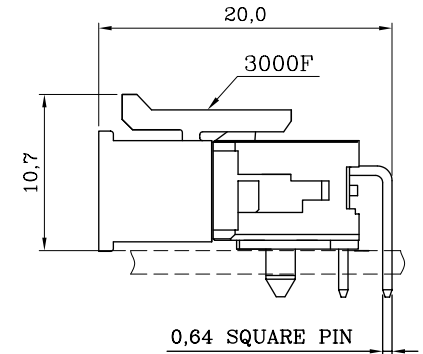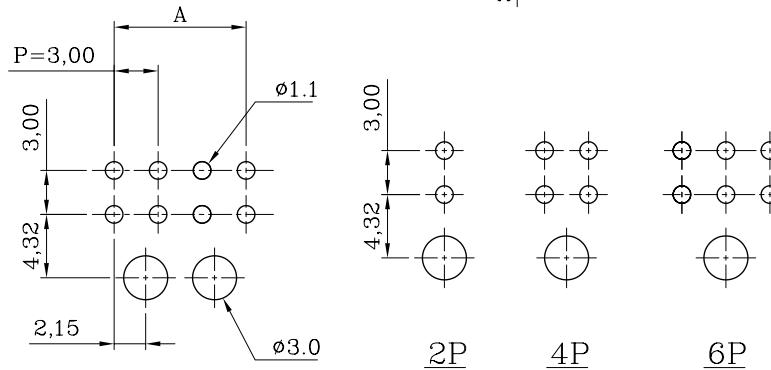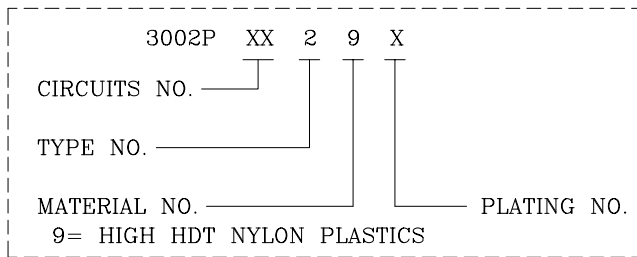

NOTES:

- MATERIAL:
BASE: HIGH HDT NYLON 94V-0, BLACK COLOR
CONTACT PIN: BRASS
- MATES WITH 3000F DUAL-ROW SERIES PLUG HOUSING.
- DESCRIPTION OF COLOR CODE:
LEGEND: 3002PXX29X-X (-X: COLOR CODE)
R=RED, E=BLUE, H=GRAY,M=GREEN, S=IVORY (NATURAL)
I=BRICK RED,
- REPLACEMENT OF HALOGEN-FREE PRODUCT:
LEGEND: 3002PXX29X-XNH (NH: HALOGEN-FREE)
LEGEND: 3002PXX29X-BNH (B=BLACK COLOR)
- INFORMATION IN THIS DRAWING IS NOT CONSIDERED AS FINAL.

DESCRIPTION OF PLATING CODE:	
V= MATTE TIN-PLATED	A= SELECT GOLD FLASH-PLATED

P.C. BOARD LAYOUT
(COMPONENT SIDE)

MATERIAL: SEE NOTES		RoHS RoHS Compliant		REACH REACH Compliant	
FINISH(COLOR): SEE NOTES					
W1	NEW RELEASE	31-DEC-14'	ANGULAR ±3°	DATE 31-DEC-14'	
REV.	REVISION RECORD	DATE			

GWT 850 °C Rated		Sales Drawing			
LANDWIN 聯盈電子股份有限公司 LANDWIN ELECTRONIC CORP.					
GENERAL TOLERANCE:	PROJECTION FREE	SCALE FREE	UNIT MM	SHEET NO. 1 / 1	REV W1
	DRAWN R.G.	DRAW NO.			
	CHECKED J.L.Lin	(CQ) 3002PXX29X			
	APPD H.Y.Lin	TITLE:			
		3.00 PITCH DUAL-ROW R/A HEADER (TYPE-2)			